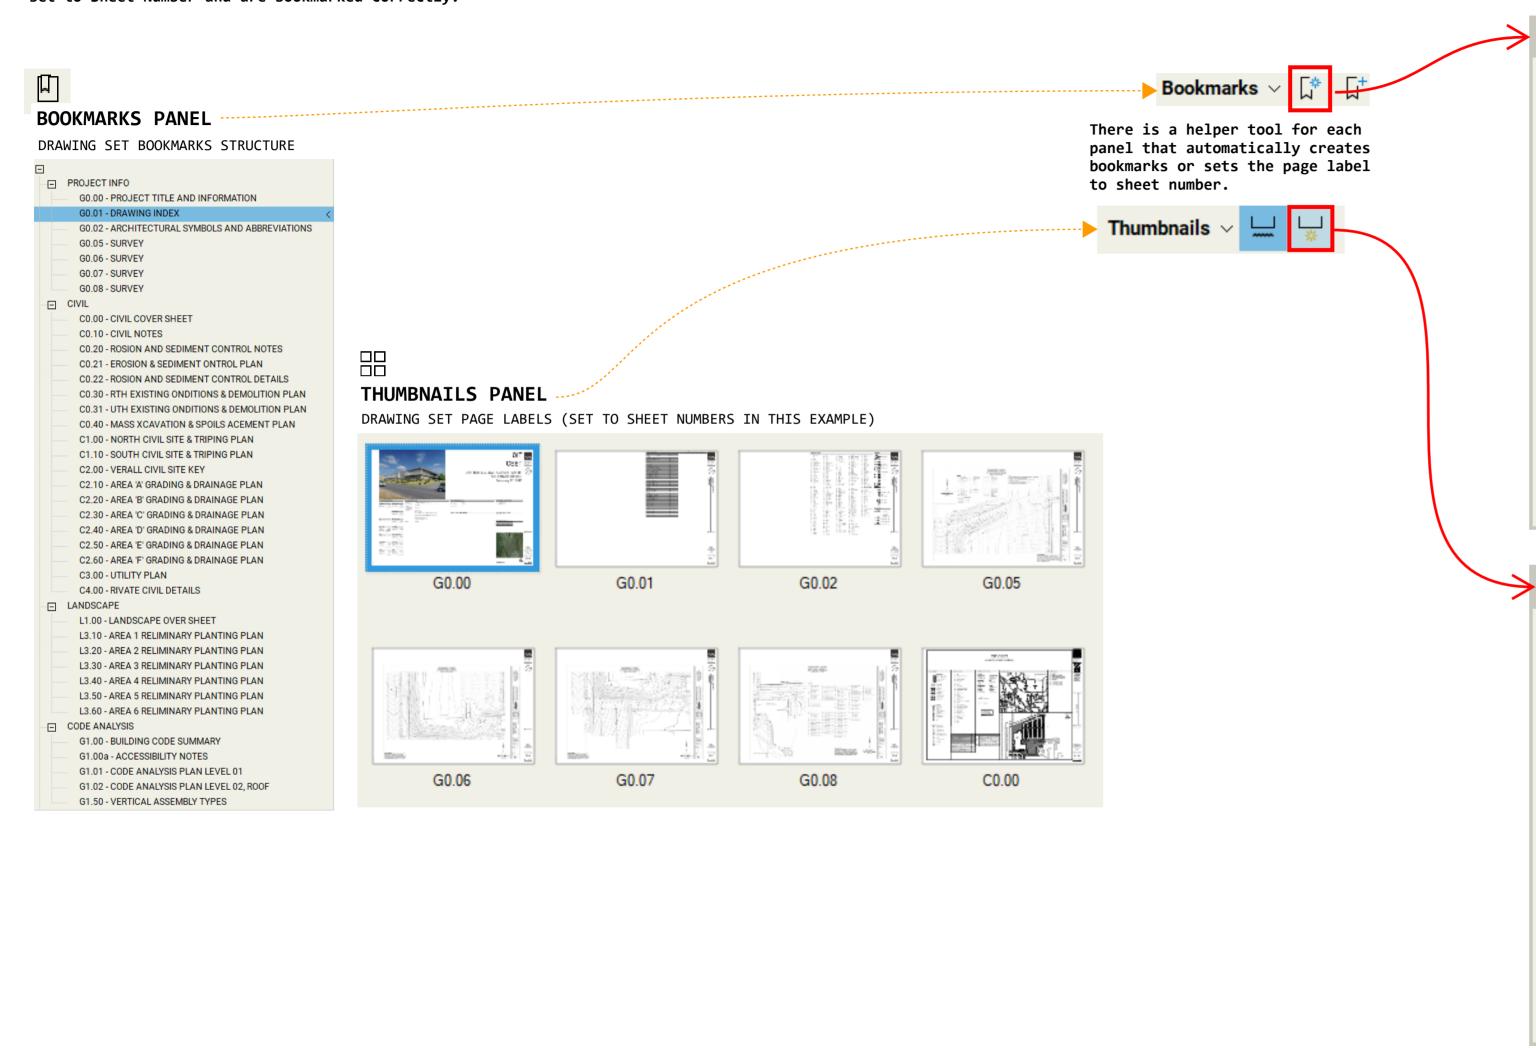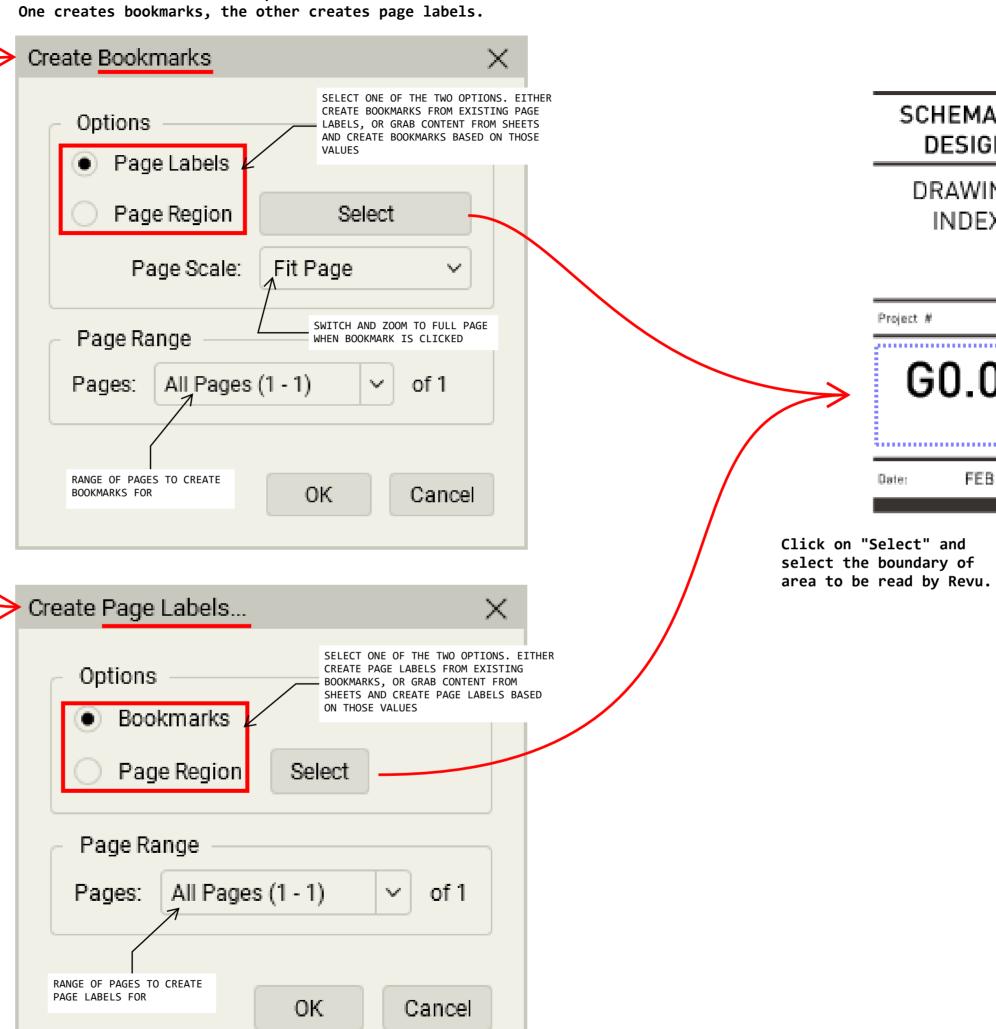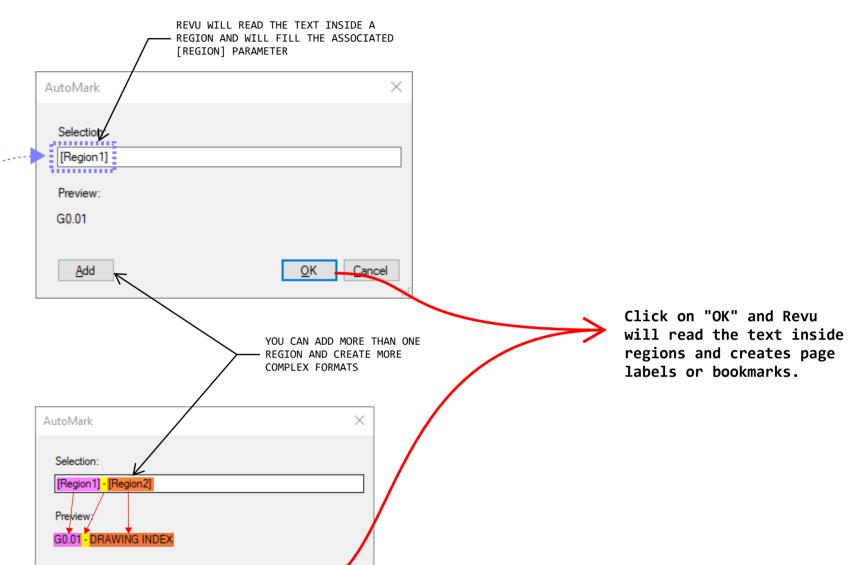# SET PAGE LABELS AND BOOKMARKS IN PDF

Drawing Set PDFs are a lot easier to navigate when page labels are set to Sheet Number and are bookmarked correctly.

The tools are identical in operation.
One creates bookmarks, the other creates page labels.

▶ Bookmarks ▾

BOOKMARKS PANEL

DRAWING SET BOOKMARKS STRUCTURE

- PROJECT INFO
  - G0.00 - PROJECT TITLE AND INFORMATION
  - G0.01 - DRAWING INDEX
  - G0.02 - ARCHITECTURAL SYMBOLS AND ABBREVIATIONS
  - G0.05 - SURVEY
  - G0.06 - SURVEY
  - G0.07 - SURVEY
  - G0.08 - SURVEY
- CIVIL
  - C0.00 - CIVIL COVER SHEET
  - C0.10 - CIVIL NOTES
  - C0.20 - ROSION AND SEDIMENT CONTROL NOTES
  - C0.21 - EROSION & SEDIMENT ONTROL PLAN
  - C0.22 - ROSION AND SEDIMENT CONTROL DETAILS
  - C0.30 - RTH EXISTING ONDITIONS & DEMOLITION PLAN
  - C0.31 - UTH EXISTING CONDITIONS & DEMOLITION PLAN
  - C0.40 - MASS XCAVATION & SPOILS ACEMENT PLAN
  - C1.00 - NORTH CIVIL SITE & TRIPING PLAN
  - C1.10 - SOUTH CIVIL SITE & TRIPING PLAN
  - C2.00 - VERALL CIVIL SITE KEY
  - C2.10 - AREA 'A' GRADING & DRAINAGE PLAN
  - C2.20 - AREA 'B' GRADING & DRAINAGE PLAN
  - C2.30 - AREA 'C' GRADING & DRAINAGE PLAN
  - C2.40 - AREA 'D' GRADING & DRAINAGE PLAN
  - C2.50 - AREA 'E' GRADING & DRAINAGE PLAN
  - C2.60 - AREA 'F' GRADING & DRAINAGE PLAN
  - C3.00 - UTILITY PLAN
  - C4.00 - RIVATE CIVIL DETAILS
- LANDSCAPE
  - L1.00 - LANDSCAPE OVER SHEET
  - L3.10 - AREA 1 RELIMINARY PLANTING PLAN
  - L3.20 - AREA 2 RELIMINARY PLANTING PLAN
  - L3.30 - AREA 3 RELIMINARY PLANTING PLAN
  - L3.40 - AREA 4 RELIMINARY PLANTING PLAN
  - L3.50 - AREA 5 RELIMINARY PLANTING PLAN
  - L3.60 - AREA 6 RELIMINARY PLANTING PLAN
- CODE ANALYSIS
  - G1.00 - BUILDING CODE SUMMARY
  - G1.00a - ACCESSIBILITY NOTES
  - G1.01 - CODE ANALYSIS PLAN LEVEL 01
  - G1.02 - CODE ANALYSIS PLAN LEVEL 02, ROOF
  - G1.50 - VERTICAL ASSEMBLY TYPES

There is a helper tool for each panel that automatically creates bookmarks or sets the page label to sheet number.

▶ Thumbnails ▾

THUMBNAILS PANEL

DRAWING SET PAGE LABELS (SET TO SHEET NUMBERS IN THIS EXAMPLE)

G0.00   G0.01   G0.02   G0.05
G0.06   G0.07   G0.08   C0.00

Create Bookmarks

Options
- ● Page Labels
- ○ Page Region   [Select]

SELECT ONE OF THE TWO OPTIONS. EITHER CREATE BOOKMARKS FROM EXISTING PAGE LABELS, OR GRAB CONTENT FROM SHEETS AND CREATE BOOKMARKS BASED ON THOSE VALUES

Page Scale: Fit Page

SWITCH AND ZOOM TO FULL PAGE WHEN BOOKMARK IS CLICKED

Page Range
Pages: All Pages (1 - 1)   of 1

RANGE OF PAGES TO CREATE BOOKMARKS FOR

[OK]   [Cancel]

Create Page Labels...

Options
- ● Bookmarks
- ○ Page Region   [Select]

SELECT ONE OF THE TWO OPTIONS. EITHER CREATE PAGE LABELS FROM EXISTING BOOKMARKS, OR GRAB CONTENT FROM SHEETS AND CREATE PAGE LABELS BASED ON THOSE VALUES

Page Range
Pages: All Pages (1 - 1)   of 1

RANGE OF PAGES TO CREATE PAGE LABELS FOR

[OK]   [Cancel]

SCHEMATIC DESIGN

DRAWING INDEX

Project #   17087

G0.01

Date: FEB 22 2019

Click on "Select" and select the boundary of area to be read by Revu.

REVU WILL READ THE TEXT INSIDE A REGION AND WILL FILL THE ASSOCIATED [REGION] PARAMETER

AutoMark
Selection:
[Region1]
Preview:
G0.01
[Add]   [OK]   [Cancel]

YOU CAN ADD MORE THAN ONE REGION AND CREATE MORE COMPLEX FORMATS

AutoMark
Selection:
[Region1] [Region2]
Preview:
G0.01 DRAWING INDEX
[Add]   [OK]   [Cancel]

Click on "OK" and Revu will read the text inside regions and creates page labels or bookmarks.